

**MADE STRONG
MADE TO LEAD**

DUDHI PRODUCTS

The Company

Dudhi Industries offer an elegant range of quality products related to Indian construction industries since many years and with complete success in serving Gypsum base products in the market, now launching an innovative product i.e. Fiber Reinforced Polymer – FRP which is a composite material made of a polymer matrix, reinforced with Glass Fiber.

With strong technical team and In-house testing facility, we have passion for developing new products at regular intervals. Our R&D department has enabled us to develop technically superior and quality efficient products.

Being an ISO 9001-2015 & 14001-2015 certified company, we have complete manufacturing facilities with advance technology at our factories equipped with advanced automatic machines so that we are able to deliver quality product as well as customized solution to the customer as required.

Dudhi Fiber Reinforced polymer - FRP products are basically manufactured with world class Multilayer Composite Unifier (MCU) Polymer technology by compressed molding system and the woven fiber fabrics are randomly arranged in it which provide more strength and flexibility to the product with complex shapes. With the use of special quality raw materials, the products are having ability to sustain heavy load vehicular traffic movement on it apart from its aesthetic value.

► World Class Infrastructure

- 4 world class manufacturing units at Dantor, Bikaner (Raj.) and Silana, Jhajjar (Hr.)
- Extensive sales and ware house network spread across the length and breadth of the country.

► Product range

The range of products offered by us are as per the requirement of building segments as under:



Gypsum Based Products	Cement Based Products	FRP Products
Gypsum Plaster (Brick Solution)	Tile Adhesive	Manhole Cover
Gypsum Plaster (Brick Solution-95)	Granite & Marble Adhesive	Gully Gratings
Plaster of Paris	Block Adhesive	Recessed Cover
Gypsum Plaster Bond	Skim Coat Plaster	Dustbin
Crack Filler	Wall Plast	Innovative Planter
Gypsum Spray Solution	Premix Plaster	Customized FRP Product
Gypsum Acoustic Plaster		




कीमत नहीं, गुणवत्ता देखें।

dudhi[®] Brick Solution

a trusted name

Dudhi Gypsum (Brick Solution) (Moisture Resistant) is a one coat plaster specifically designed to provide protection in wet areas like bathroom, kitchens, basement, garages, balconies, parking podium etc. It provides extra protection with low absorption of moisture in air or from surface giving excellent results in skirting area application with problems arising out of capillary action and efflorescence. It can be directly used over backgrounds like bricks, blocks, RCC etc and provides a smooth inert, high-quality surface to internal walls and ceilings and a durable base for application of decorative finishes.



► Technical Specification

Description	Dudhi Gypsum Brick solution
Setting Time (Minutes)	20-25
Dry Bulk Density kg/m ³	750-770
Tensile Strength Kg/cm ²	22-30
Compressive Strength N/mm ²	3-6
Coverage 13mm (kg/m ²)	14
Ingredients	Calcium Sulphate Hemihydrate + Light weight aggregates like "Vermiculite" and special additives
Thermal Resistance m ² k/w/13mm	0.07
Gypsum Purity (%)	80-85
Fire Resistance	Non-Combustible as per BS 476: Part 4:1970
Shelf Life	6 Months from the date of manufacturing
Chemical Composition	Calcium Sulphate Hemihydrate: CaSO ₄ . ½ H ₂ O
Drying Type	Setting

► Performance

Description	Sand Cement Plaster	Dudhi Plaster (P.O.P)	Dudhi Gypsum (Brick Solution)
Direct Application (Brick/Block/RCC)	✓	X	✓
Line & Level	X	✓	✓
Time Saving	X	X	✓
Smooth Finish	X	✓	✓
Quality Assurance	X	✓	✓
Water Curing	✓	Does Not Require	Does Not Require
Shrinkage Cracks	✓	Does Not Appear	Does Not Appear
In-House Manufacturing	X	✓	✓

► Consumption of Material

Consumption Per mm/ Per Sq. Ft.- 0.100 kg

Coverage 13mm Thickness 30 sq-ft/40 kg bag, 19 sq-ft/25 kg bag



Saves Water



Fire Protection



Aesthetics



Temperature Control



Crack Free



Economical

► Features & Benefits

- Eliminates two-step process of Sand Cement Plaster and POP punning
- Doesn't require water curing
- No shrinkage cracks
- Non-combustible (when tested in accordance with BS: 476: part 4:1970), therefore a good form of thermal protection to the building structure.
- Use of light weight aggregates in the plaster mix help to improve Low thermal conductivity (0.25 W/m-K) as compared to Sand Cement Plaster (0.72 W/m-K) ** keeps room cooler in summer and warmer in winter; saving in energy cost
- The water absorption as per DIN EN 520 is less $\leq 10\%$
- Excellent Capillary
- Water absorption coefficient test method – BS EN 1015-18.

► Available Sizes 25 kg and 40 kg

► **Identification & Packing** Dudhi Gypsum (Brick Solution) (Moisture Resistant) is packed in PP bags. The outer layer of the bag is printed with the product image, batch number, date of manufacturing, correspondence address and application instructions.

► Backed by Superior Service

- Technical service team offers regular site training to use tools and technology to improve productivity.
- Intermediate site inspections and feedback.
- Recommend trained application Team.
- Largely distributed manufacturing capacity.

► Testing Standards

- Confirms to IS 2547 (Part I) – 1976 for physical & chemical characteristics
- Confirms to IS 2547 (Part II) – 1976 for physical characteristics
- HSN Code : 252020, GST : 5%


► Certification:

- Conforms and Certified to IS 2547: Part 1 and 2 of "The Bureau of Indian Standard" as per licence number CML-8400019909
- Meets standards of Green Pro certification and qualifies as green product.

► **Storage & Handling** Dudhi Gypsum (Brick Solution) (Moisture Resistant) is supplied in 40Kg bags. The dimensions of the bag ensure that a well-filled appearance is presented when filled and the bags can be stacked on a pallet in a stable and well-stacked array. Bags should be stored dry, as absorption of water shortens the setting time, causes set lumps to form in the bags and may reduce the strength of the set plasterwork. No hooks or any sharp tools should be used to carry bags from one location to another.



► **Application Areas** Dudhi Gypsum (Brick Solution) one coat plaster can be applied on most internal surfaces like Bricks, Blocks & RCC (Concrete) surfaces.



► **Background Preparation** Surfaces should be completely clean, reasonably dry, protected from the direct exposure from weather and suitable for the chosen specification. In addition, before plastering concrete backgrounds, ensure that any mould oil or Concrete Curing Agent (other agents) present are removed from the surface. No-fines concrete does not require wetting prior to plastering. Plaster should not be applied onto a 'green' background or when any free water is visible. Clean water should be applied 5-10 minutes before plaster application to control the suction. In-situ or pre-cast concrete which are exceptionally smooth or having low suction will require pre-treatment with Dudhi Plaster Bond bonding agent.

► **Mixing** Dudhi Gypsum (Brick Solution) (Moisture Resistant) is pre-mixed with aggregate and only clean water needs to be added to prepare it for use. Mixing should be carried out in a clean tray or bucket. Excessive mechanical mixing should be avoided. Tools and water used in mixing must be clean. Contamination from previous mixes can shorten the setting time and in turn reduce the strength of the plaster when set. Water to plaster ratio (1 part of water: 1.5 part of plaster by weight) should be maintained to have good cohesive workable mix. Prepare plaster mix as much as required depending upon the immediate scope of work. Once the mix has begun to set, additional water is not to be added, as performance properties of plaster will get altered, thus affecting workability, cohesiveness, adhesion properties and strength.

► Application



Step-1
Level mark on wal



Step-2
Filling plaster material



Step-3
Flatten the Plaster



Step-4
Thin slurry coat for finishing



Step-5
Trowel



Step-6
Ready surface for painting

Dudhi Gypsum (Brick Solution) (Moisture Resistant) should be applied with firm pressure, built out to the required thickness, and ruled to an even surface and left as an undercoat to form a key for finish coat. A thin plaster mix is made and applied as a finish coat to provide smooth surface. It can be applied to an average thickness range of 6-15 mm on walls in one coat and up to 10 mm on ceilings. For thickness above this range, material needs to be applied in two coats. The thickness should not increase to more than 30 mm (average thickness) on walls and 20 mm (average thickness) on ceiling. After complete drying for usually 72 hrs (depends upon thickness and weather conditions) the plain smooth leveled surface is ready for painting.

► Precautions

- Dissimilar expansion and contraction of RCC and brick / stone masonry could cause stresses and at times separation. To reduce the separation cracks, use of 145 GSM glass fiber mesh (at the junction) is recommended.
- It is not suitable for use in long continuously damp or severely humid conditions
- If Gypsum Plaster is to be applied on RCC surfaces with the thickness of the application being more than 15 mm then It is to be applied only when moisture is very low and the temperature is more than 10 degrees Celcius because RCC construction has almost negligible porosity as compared to NON-RCC SURFACES. Hence it cannot absorb water.

► External Plaster Work Care


In case Dudhi Gypsum (Brick Solution) is applied on internal walls but the exterior cement plaster work of the same wall is pending then Cement Plaster work must be completed prior to painting of the internal walls. Any seepage of moisture during curing from outside will from escape surface of the Gypsum plaster. Please note that the escaping water from Dudhi Gypsum (Brick Solution) may leave some green spots on the surface which can be easily removed with the help of sand paper and then Paint work of the internal walls should be done.

It is not suitable for use in long continuously damp surfaces. For application make the substrate dry and then application to be made.

The information herein should not be read in isolation as it is meant only as guidance for the user, who should always ensure that they are fully conversant with the products and systems being used and their subsequent installation prior to the commencement of work.

Brick Solution 95

Brick Solution 95 is developed by Dudhi Gypsum Pvt. Ltd. to enhance range of Gypsum plaster and present a quality product to the internal plastering system. This plaster is Gypsum based ready mixed one coat application product which can be applied directly on brick/block walls and concrete ceilings. It eliminates both sand cement and POP application. Special formulation which is able to provide extraordinary features like more coverage, high quality finish, easy to apply, crack free surface, etc.



► Technical Specification

Description	Dudhi Gypsum Brick solution
Setting Time (Minutes)	20-25
Dry Bulk Density kg/m ³	740-750
Tensile Strength Kg/cm ²	22-30
Compressive Strength N/mm ²	3-6
Coverage 13mm (kg/m ²)	13
Ingredients	Calcium Sulphate Hemihydrate + Light weight aggregates like "Perlite" and special additives
Thermal Resistance m ² k/w/13mm	0.07
Gypsum Purity (%)	80-85
Fire Resistance	Non-Combustible as per BS 476: Part 4:1970
Shelf Life	6 Months from the date of manufacturing
Chemical Composition	Calcium Sulphate Hemihydrate: CaSO ₄ . ½ H ₂ O
Drying Type	Setting

Dudhi[®] Plaster of Paris

a trusted name

Dudhi Plaster of Paris is the highest grade quality plaster which will support your ideas about gorgeous interiors in to a reality. It consists of gypsum hemihydrates specially treated high purity gypsum and additives to achieve strong, durable plaster and with more coverage. This plaster is most suitable for application of internal plastering system as punning of walls and ceilings, all decorative works like cornices, roses, moldings, arches apart from in-situ false ceiling systems.




Superior whiteness of this plaster assures aesthetics of interiors and Micronics Grinding Method (MGM) provide extra fineness which results into smooth and fine carvings as desired.

Dudhi Gypsum guarantees consistency in quality in terms of setting period, coverage, free from impurities, weight, etc which generally occurred in batch-after- batch process.

► Technical Specification

Parameter	Dudhi Gypsum Plaster of Paris
Setting Time (Min.)	15-25
Density kg/m ³	780-800
Tensile Strength Kg/cm ²	15-20
Compressive Strength N/mm ²	2-4
Coverage in sq. ft./25kg bag (8mm)	30
Whiteness (%)	80-85
Fineness(%)	99
Shelf Life	6 Months from the date of manufacturing
Manufacturing	In House

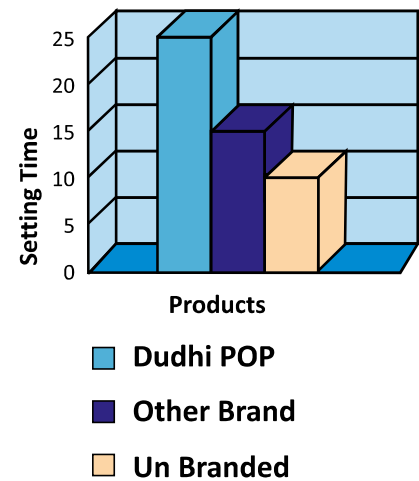

► Advantages

- Maintained better fineness as Micronics Grinding method.
- Constant quality achieved by advance technology in manufacturing machineries.
- Uses high purity Gypsum which provides good performance of strength and bonding.
- Free from silica and other impurities.
- Coverage of this Plaster is more compared to other Plaster of Paris.



No hacking no wire mesh no de-bondinggo for Dudhi Plaster Bond.

Dudhi Plaster Bond is a bonding agent which provides excellent performance to bond Gypsum based plasters on RCC background for internal plastering systems . It is specially formulated ready to use adhesive which consists resins, aggregates and additives. It eliminates roughening, hacking and wire mesh on concrete surface. It is an ultimate choice to put a single coat by brush/roller application which is sufficient and safe solution for the Gypsum plasters. It provides chemical as well mechanical key to the plaster. Available packing size in 1, 10 & 20 kgs. bucket.



► Technical Specification

Parameter	Dudhi Gypsum Plaster Bond
Ingredients	Resin + Aggregate
Solid Content (%)	55 - 65
pH Value	8-10
Background	RCC
Coverage	5* m ² /kg
Colour	Green
Soluble	In Water
Subtainability (°C)	2 - 50
Shelf Life	6 Months from the date of manufacturing

► Test Results With Bond and Without Bond

Parameter	Age	Load (KN)	Pull out Strength (N/mm ²)
Without Bonding Agent	After 28 days	1.45	1.45
With bonding Agent (Plaster Bond)	After 28 days	3.60	3.60

► Product Features

- Excellent cohesive bond to RCC, Concrete and other surface.
- Fine aggregate provides good mechanical bonding.
- Eliminating hacking/fixing wire mesh for plastering on direct RCC surface.
- Higher coverage.
- Ready to use nothing to be added at site. Do not add water.
- Due to green colour it is easy to identify the covered area during application.
- Easy application by Brush/Roller.
- No post/pre- curing is required.

► Direction for Use

- Ensure the substrate is free from dust, wetness, mould oil and loose material.
- Stir well before use the adhesive as the aggregates should mix properly.
- Allow to the coat dry thoroughly (Approx 24 hours) before plastering work starts.
- Coated surface should be plastered within 10 days .


3 STEP TO USE



Step 1:
Open and stir the contents



Step 2:
Apply with a paint brush



Step 3:
Dry for 24 hrs. surface ready for plastering



Dudhi Crack Filler is a gypsum-based product for filling cracks and cavities in walls. Dudhi Crack Filler contains a Polymers, Fillers & Extenders, Dispersing Agents, cellulose derivative, which improves cohesive strength and promotes adhesion to ceiling boards, plaster, lime, cement.



► Technical Specification

Parameter	Dudhi Gypsum Crack Filler
Type	Gypsum Based
Setting Time (Min)	25-30
Moisture Resistance	Good
Wet Bulk Density	1.40 – 1.60 gm/cm ³

► Features

- Low shrinkage -fills up to 1 mm - 2mm gaps
- Good anti-slump / non-sag properties – easily applied to vertical surfaces
- Excellent workability – easy to spread and smooth
- Paintable in 3 hours – can complete the job quickly
- White finish – less tendency to show through after painting
- High strength – can hold screws without cracking
- Good sanding and painting properties – easy to achieve desired finish Applications Filling cracks, slits, cavities and gaps on walls. Also used as a skimming agent for the smoothing of irregular wall surfaces.


► Application

- Smooth cracked area with a utility knife or similar tool, cutting away any jagged edges to form a “v” shape
- Excess crack filler must be worked away from the crack and smoothed off with a lightly wetted putty knife or trowel to avoid any excess crack filler from hardening in undesirable areas
- Clean the putty knife regularly with a damp cloth, which will ensure a smooth lump-free finish
- All repaired cracks must be allowed to dry for 3 hours before sanding and painting



► Useful Tips

- Add upto 3 parts of crack filler to 1 part of clean cold water (to form workable consistency).
- Mix to a smooth lump free paste
- Do not mix more paste than can be used within 30 minutes
- Use an 80-100mm wide flexible putty knife to feather the edges of the patch to approximately 30mm on either side of the crack. This will make the crack less noticeable to the eye.
- Dudhi Crack Filler adhesive must be kept in normal, dry conditions and protected from damp. The product has a shelf life of approximately 9 months if stored, as described above, in its original sealed moisture tight container
- Not suitable for repairing of structural faults (foundation movements and substrate)
- Not suitable for external use
- Dudhi Interior Crack Filler contains no harmful materials but may cause skin irritation to some individuals. Do not ingest and avoid contact with eyes.



Dudhi[®] Spray Solution

a trusted name

Dudhi Gypsum Spray Solution is latest innovation for internal plastering system. This is a ready mix plaster which can be directly applied on any solid background as Brick/Block and RCC substrate for ceiling and walls plastering. Specially formulated and designed Spray Solution having properties of Cracks free finish, Good Impact Strength and Durable. It is ideal for application in High Rise Apartments, Group Housings, Builder's Flats, Bungalows, Pent Houses, Office Buildings, RMI, Commercial Complex, Shopping Malls and Hotel Buildings.




► Technical Specification

Parameter	Dudhi Gypsum Spray Plaster
Setting Time (Min.)	60-180
Density kg/m ³	700-730
Tensile Strength Kg/cm ²	22-30
Compressive Strength N/mm ²	5-8
Coverage 13 mm (kg/m ²)	12
Ingredients	Gypsum + Imported Aggregate + Additive
Thermal Resistance m ² k/w/13mm	0.07
Gypsum Purity (%)	80-85
Shelf Life	6 Months from the date of manufacturing
Manufacturing	In House

► Advantages

- Longer setting material provides better work ability.
- Suitable to machine-manual application hence save time & labour cost.
- More material goes to the walls in less time.
- Less man days required as approximate 50 to 60 % Labour Saving.
- No water curing.
- Greater Bonding.
- Direct application.
- Good Impact strength.
- Economical.



► Application


1. **Mixing** - Spray Solution is designed to work with pump spray machines. Simply open the bag over the machine hopper and the machine automatically mixes the plaster to consistent mix on demand.
2. **Spray** - Spray Solution is sprayed to an even thickness. The first layer is sprayed horizontally and the second layer is sprayed vertically (known as cross-hatching)
3. **Flatten** - After 5-10 minutes, the sprayed surface is flattened with aluminum Strip.
4. **Trowel** - The surface is trowel finished in three stages. After completely material get set. The wall/ceiling is now finished. Once dry, the surface is ready for decorating with painting or additional treatment.



dudhi[®] Acoustic Plaster

a trusted name

Dudhi Gypsum Acoustic Plaster is an innovative product Introduced by company after getting great success of ready mix Gypsum based plaster ie : Brick Solution. This plaster is specially formulated and designed as suitable to internal plastering which provides visually appealing aesthetics, good adhesion on to the walls and ceilings, durable, most economical apart from greater sound absorption (NRC) property. Dudhi Gypsum Acoustic plaster consists with special imported ingredients as Aggregates, additives and Calcium Sulphate . It is ideal for application in Reception areas, Auditoriums, Meeting Rooms, Cinema/Multiplexes, Banquets, Banks, Class Rooms, Sound Recording studios and Educational Institutes where NRC value is more importance.





► Technical Specification

Parameter	Dudhi Gypsum Acoustic Plaster
Setting Time (Min)	22-28
Density kg/m ³	600-650
Tensile Strength Kg/cm ²	18-22
Compressive Strength N/mm ²	2-3
Coverage 13 mm (kg/m ²)	10.5
Ingredients	Gypsum+ Imported Aggregate + Additive
Noise Reduction Coefficient (NRC)	0.60
Shelf Life	6 Months from the date of manufacturing
Manufacturing	In House


► Advantages

- Good Acoustic Plaster properties as Noise Reduction Co-efficient (NRC) value - 0.60.
- No Post Curing is required.
- Free from shrinkage cracks.
- Manufacturing with advance technology & special formulation.
- Less wastage and higher coverage makes it economical.

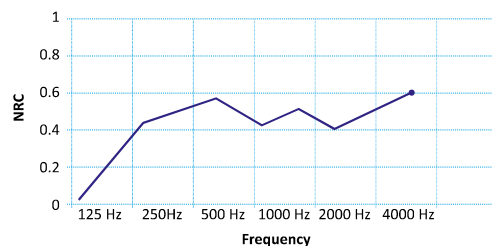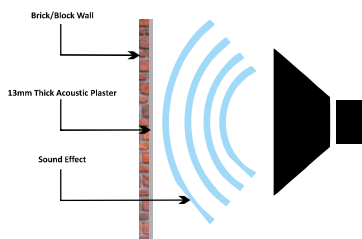




Manhole Cover Circular




Water Tank Square



Manhole Cover Rectangular




Manhole Cover Square




Gully Grating Square




Manhole Cover Double Door



Recessed Cover

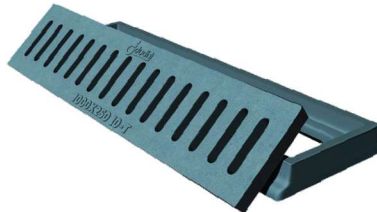


Gully Grating Rectangular

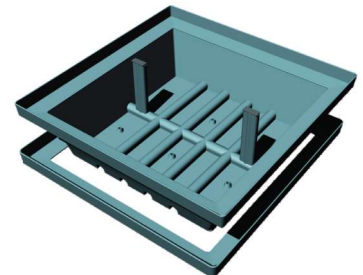

Lawn Manhole Cover



Light Duty Manhole Cover



Tree Grating



FRP Dustbin



Shock Proof



Low Maintenance



High-Load Capacity



No-Colour Fading



Leak Proof



Anti-Theft



Long Life



Aesthetics



Lightweight



Weather Proof

dudhi[®] FRP Designer Planters

a trusted name

We take pleasure in introducing our innovative design solutions to make relationship between nature and human life which is precious and uncompromising.

Nowadays our high technology, gadget friendly cities may provide us with everything but we are totally missing out on opportunity of connecting to the elements of nature. Nature and its components when comes in sync with humans they restructure our brain patterns, and it's all for good. It causes rejuvenation and happiness.


We are a part of nature – let us reconnect with ourselves by making natural elements a bigger part of our daily lives.

Thoughtfully picked natural plants can offer meaningful interaction with nature with a psychologically restorative natural environment even in a dull and boring space.


Bringing garden indoors or having some greenery at work spaces & homes connects you directly with Mother Nature. Caring and growing plants around boosts moods, reduces stress, increases productivity and well-being and lets you breathe fresh with better air quality.

We believe that people with refined aesthetic sensibilities should have something palpably fashionable at their disposal.

How Self Watering Works

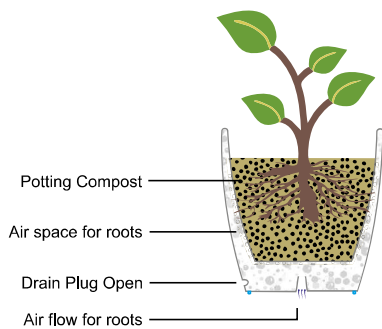

Dudhi Planter

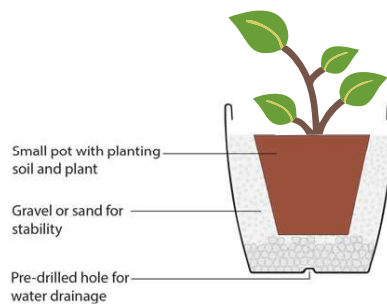

Other Planter

- Ventilation
- Excess Water Management
- Easy Portability



For another communication

Address: Jaipur Branch Office-II- Prithavi Raj Road, Opp-Bharat Overseas Bank Limited ,C-Scheme, Jaipur, JAIPUR,RAJASTHAN,302001
Phone: 0141-2223282, 2223283,2223284
Fax: 0
E-Mail: jpbo-2@bis.gov.in
Web: www.bis.org.in, www.manakonline.in

BUREAU OF INDIAN STANDARDS

Attachment to Licence No. CM/L- 8400019909

CM/L-No	Name of the Licensee with the Factory Address	Name of the Product	Indian Standard No.
8400019909	Dudhi Industries Private Limited -Chak 6 PRM, Pugal Road, DANTOR - 334023 Tehsil : Khajuwala , DANTOR : 334023	gypsum building plaster: Part 1 Excluding premixed lightweight plaster	IS 2547 : PART 1 : 1976

Endorsement No. 7 Dated 11-Oct-2022

Whereas, the licence was valid upto Sixteenth September Two Thousand Twentyf wo.
Now, consequent upon renewal, the validityof the licence given in schedule of the Licence Dated 15-SEP-2022 has been extended from Sixteenth September Two Thousand Twentyf wo to Fifteenth September Two Thousand TwentyThree
Other terms and conditions of licence remain same.

Branch Head (Jaipur Branch Office-II)

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002, 9 Bahadur Shah Zafar Marg, ,DELHI,110002

Contact No: +91 11 23230131, 23233375, 23239402 **Fax:** +91 11 23234062, 232 **Email:** info@bis.gov.in

3/20/2021

Print : Udyam Registration Certificate



Udyam Registration Number : UDYAM-HR-05-0014058	
Type of Enterprise	SMALL
Type of Organisation	Private Limited Company
Owner Name	M/S DUDHI INDUSTRIES PRIVATE LIMITED
Major Activity	Manufacturing
Name of Enterprise	M/S DUDHI INDUSTRIES PRIVATE LIMITED
Owner Name	PAN AAGCD0484L
ITR for Previous Year	Yes ITR Type ITR -3, 5, 6
Do you have GSTIN	Yes Mobile No. 9311315461
Email Id	dudhiplaster@gmail.com Social Category General
Gender	Male Specially Aabled(DIVYANG) No
Date of Incorporation	01/03/2017 Date of Commencement of Production/Business 01/03/2017

Bank Details

Bank Name	ICICI BANK
IFS Code	ICIC0002452
Bank Account Number	245205000167

Employment Details

Male	25
Female	3
Other	0
Total	28

Investment in Plant and Machinery OR Equipment (in Rs.)

Written Down Value (WDV) as on 31st March of the Previous Year 2018-19 (A)	19752990
Exclusion of cost of Pollution Control, Research & Development and Industrial Safety Devices during 2018-19	0
Net Investment in Plant and Machinery OR Equipment[(A)-(B)]	19752990
Total Turnover (A) during 2018-19	15114869
Export Turnover (B) during 2018-19	0
Net Turnover [(A)-(B)]	15114869

Unit(s) Details

SN	Unit Name	Flat	Building	Village/Town	Block	Road	City	Pin	State	District
1	DUDHI INDUSTRIES PVT LTD	Factory Kharsa 70609	Naurangpur Road	Jhajjar		Silana	Jhajjar	124103	HARYANA	JHAJJAR
2	DUDHI INDUSTRIES PVT LTD	56/4	Chak 6 PRM	DANTOR	CHAK 6 PRM	PUGAL ROAD	BIKANER	334023	RAJASTHAN	BIKANER

Official address of Enterprise

Flat/Door/Block No.	F-238,239	Name of Premises/ Building	TOWER-B
Village/Town	PALAM VIHAR ,BLOCK-C2	Block	ANSAL CORPORATE PLAZA
Road/Street/Lane	SECTOR-3	City	GURUGAON
State	HARYANA	District	GURUGRAM, Pin : 122017
Mobile	9311315461	Email:	dudhiplaster@gmail.com

National Industry Classification Code(S)

<https://udyamregistration.gov.in/PrintApplication.aspx?udrm=gp0tamzeKIOvR6ApvyAraA==>

3/4

UQSR
Certificate

UQSR Global Private Limited has assessed the Quality Management System of:

Dudhi Industries Pvt. Ltd.

Manufacturing Plant I:- 56/4, Chak 6PRM, Pugal Road Dantor, Tehsil- Khajuwala, District- Bikaner, Rajasthan – 334004, India

Manufacturing Plant II:- Khasra No- 60, Naurangpur Road, Village Silana, Teh.-Jhajjar, District- Jhajjar, Haryana – 124103, India

And hereby declares that the management system of organization is in conformance with:

ISO 9001:2015

For the following scope of activities:

Manufacturing and Supply of Gypsum Plaster, Plaster of Paris, Block Mortar, Tile Adhesive, Wall Putty, FRP Planters, FRP Manhole Covers

Further clarification regarding the scope of this certificate and the applicability of Quality Management System standard requirements may be obtained by contacting the organization

Certificate No. UOSR-3029-DIPL

Original Issue Date: 10/11/2022

Expiry Date: 09/11/2023

Current Issue Date: 10/11/2022

Recertification Due Date: 09/11/2025

IAF Code. 12, 16

Issue No. 01

*Validity of certificate is subjected to the continued satisfactory performance during surveillance audit



Authorized By

[Signature]
Certification Manager

UQSR Global Private Limited
Formerly known as

Universal Quality Standards Registrar
www.uqsr.org

For information concerning validity of certificate, you can visit the site: www.uqsr.org

This document is property of UQSR and should be returned on request. Any unauthorised alteration, forgery or fabrication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Govt. Of India
O/o Additional Director General (RD)
Central Public Works Department,
Nirman Bhawan ,
New Delhi – 110011
Telephone- 011-23062284,
FAX- 011-23061855

भारत सरकार
कार्यालय अयोजनाधिकारक (शोध/वि),
के.ए.सी.बिल्डिंग, निर्माणभवन
नई दिल्ली-110011
दूरभाष-011-23062284
फैक्स-011-23061855



No. 20(3)/ADG/RD/Project Approval/W&TLQA/2020/ 3686

Date: 29/12/2022

कार्यालय आदेश

विषय :- Approval of products manufactured by M/s/ Dudhi Industries Private Limited.

M/s Dudhi Industries Private Limited, के पत्र सं. 29/12/2022 के द्वारा उनके अनुरोध को स्वीकार करते हुए आर महाविभाग (शोध/वि) महोदय ने निम्नलिखित उत्पादों को इस रीजन के अधीन कार्यालयों द्वारा जारी की जाने वाली एन.आई.टी. की Approved make list में सम्मिलित करने हेतु अनुमोदित कर दिया है।

क्र.सं.	उत्पाद का विवरण	उत्पाद का ब्रांड
1.	Gypsum/Gypsum Plaster	"DUDHI" FROM DUDHI INDUSTRIES PRIVATE LIMITED

यह अनुमोदन निम्न शर्तों के साथ किया गया है :-

- यह अनुमोदन इस आदेश के जारी होने के पश्चात एक वर्ष के लिए वैध है, यदि इसका पुनः नवीनीकरण नहीं कराया गया तो अनुमोदन एक वर्ष पश्चात स्वतः समाप्त हो जायेगा।
- यह अनुमोदन कार्यालयक / परीक्षणक/ निरीक्षणक तथा संबंधित अधिकारी को उनके जांच के समय तथा / दर व उत्पाद को रखता के उपस्थापित से शुरू नहीं करता। यदि कार्यों में प्रयोग के दौरान कोई कमी या त्रुटि या कमी सुधारायक होती है जो इस कार्यालय को तुरंत सूचित किया जाए।
- इस अनुमोदन का यह कर्तव्य अभिग्राहक नहीं है कि अनुमोदित कंपनी को ही कार्य करने का अधिकार है या इस कंपनी के उत्पादों को ही प्रयुक्त किया जायेगा। कार्य / प्रोक्वैमेंट अन्य कंपनी के प्रतिस्पर्धात्मक दरों के अनुसार जा के निर्दिष्ट आश्वासन सूचना में सम्मिलित है पर निर्भर करेगा।
- क्रम के उत्पादों की पर्याप्तता की निगरानी कार्य स्थल यूनिट (Field Unit) द्वारा की जायेगी तथा रिपोर्ट इस कार्यालय को समय समय पर प्रेषित की जायेगी।
- उत्पाद की गुणवत्ता में संबंधित विकासक आने पर यह अनुमति निरन्तर की जा सकती है।

कार्यालयक अभियंता (सि.), कार्य (टी.एन.क्यू.ए.)

प्रतिनिधि:- (सेल द्वारा) -

- इस मौज्जा के अंतर्गत सभी मुख्य अभियंताओं, अधीक्षण अभियंताओं एवं कार्यालयक अभियंताओं को सूचना एवं आश्वासन कार्यवाही हेतु।
- M/s Dudhi Industries Private Limited, F-238, 239, 1st Floor, Tower-B, Palam Corporate Plaza, Block-C2, Palam Vihar, Gurugram-122001 Haryana for information.

कार्यालयक अभियंता (सि.), कार्य (टी.एन.क्यू.ए.)

► List of Reputed Customers

 Various Projects, INDIA	 Gurgaon	 Vasant Vihar, New Delhi
 Gurgaon	 Sec.-104 & 111, Gurgaon Sec.-81, 88, Faridabad	 BHIWADI, RAJSTHAN
 Various Projects, INDIA	 Various Projects, Delhi NCR	 Various Projects, Delhi NCR
 Westin Hotel, Gurgaon, Faridabad	 Sec.-102 Gurgaon (P.O.P. & Bricks Solution)	 Malviya Nagar, Jaipur
 Gurgaon	 Sec.-60, Gurgaon	 Various Projects, Delhi NCR
 Gurgaon	 Presidia , Sec-62, Gurgaon	 Sector 102, Gurugram
 Gurgaon	 Paras Irene, Sec.-70A Gurgaon	 Splendor Megapolis, Hinjawadi, Pune
 Gurgaon, Noida Godrej Prana, Infinity Pune	 KRRISH IBIZA IN, Suraj Kund, Faridabad	 Central Vista Parliamentary division Mussoorie polo ground
 Gurgaon	 JP Greens and JP Hospital, Sec.-128, NOIDA	 Gurgaon
 Gurgaon	 Sector 45 & 107, NOIDA	 Various Projects, Delhi NCR
 Gurgaon	 Supernova Noida Express-way, Noida	 Krajeja Commorzone, Yerwada, PUNE
 Gurgaon	 Moderne, Mezzaria, Merabella, Meadows, Mywoods, Mantra SEC 78, NOIDA	 Shweta Aryan, Jeedimetla, hyderabad
 Gurgaon	 Cherry County, Cleo County, SEC 121 Noida (U.P.)	 Nakshatrawadi, Aurangabad
 The Palm Drive & The Palm Spring, Gurgaon	 Apex Athena Sec-75, Noida (U.P.)	 Rajarhat New Town, Kolkata (WB)
 Manesar, Gurgaon	 Vaishali, Ghaziabad, U.P	 38, Park Majestique, Undri Majestique City, Wagholi, Majestique Magnum, Pisoli, Palm Atlantis, Wagholi
 Various Projects, Gurgaon	 Sec. - 104 & 109, Gurgaon Sec.-150, Noida	 Mahaveer Park, Mahaveer Corner, Mahaveer Delight, Dhruv Residency, Della Regency, Yashodhan Daffodills, Deveyani Residency
 Various Projects, Delhi NCR	 Various Projects, Delhi NCR	 Dynamic Realty, Dynamic Oasis, Pune Dynamic Linea, Pune
 Various Projects, Delhi NCR	 AERO City, New Delhi	 Various Projects, Delhi NCR

कीमत नहीं, गुणवत्ता देखें।



Dudhi Industries Pvt. Ltd.

Corporate Office: F-238,239, Tower-B, Palam Corporate Plaza, Palam Vihar, Gurugram-122 017 (HR.)

Regd. Office: B-1/2, Ashok Vihar Phase - III, Gurugram-122001(HR.)

Manufacturing Plants:

- M.No.- 56/4, Chak 6PRM, Pugal Road, Dantor, Tehsil - Khajuwala, Dist.-Bikaner, (Raj.)
- Khasra No.-60, Naurangpur Road, Village- Silana, Tesil-Jhajjar, District-Jhajjar-124103 (HR.)

T : +91 9560393000, +91 9560393006

E : info@dudhi.in | **W :** www.dudhi.in